


Harness Layout for RIGID BODY Vehicle - 26/07/2016 11:39

3pin x 2x2pin Y cable
0704.01.0.03002


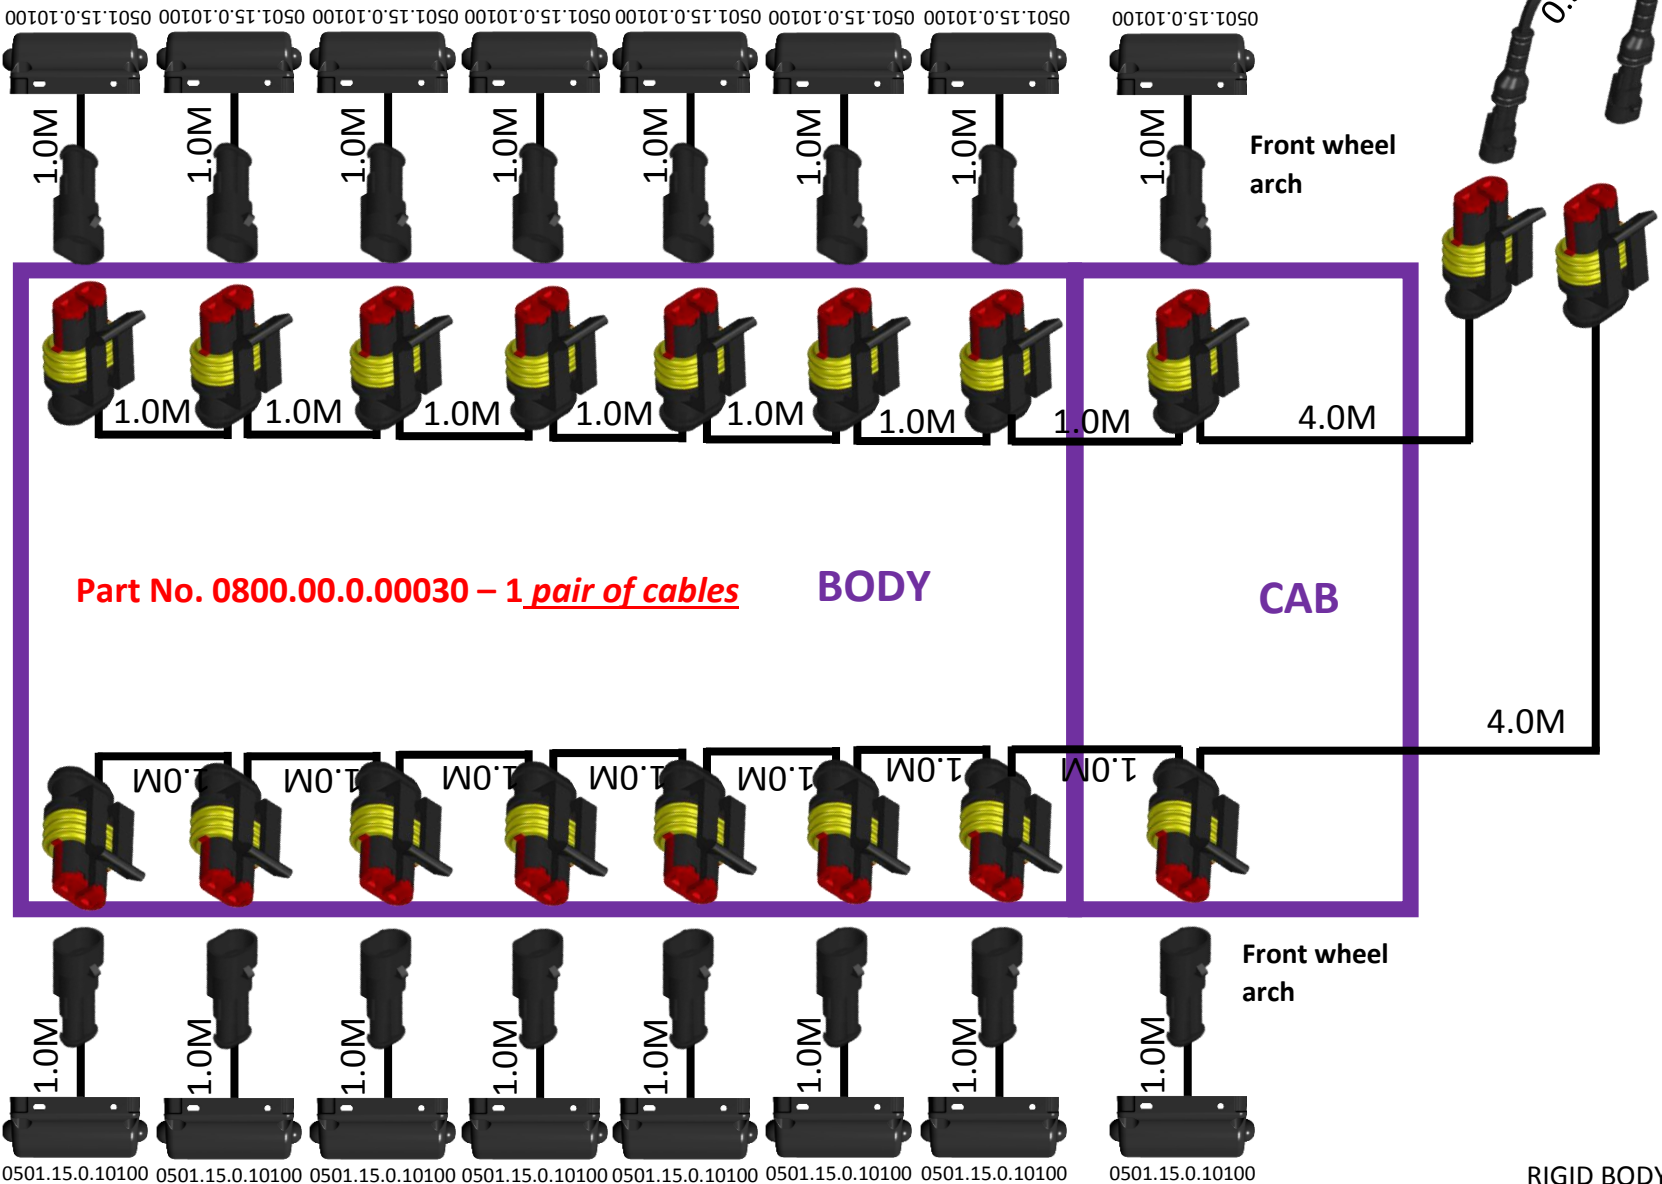


26/07/2016 11:39

3pin x 2x2pin Y cable
Part No. 0704.01.0.03002
NOT TO BE PRESENT ON NEW BUILDS to meet with
DfT & VCA agreement for type approval 05.05.2015

These 2 off connectors/wires **MUST** be connected/wired into, the **switchable 'SIDELIGHT'** feeds on the vehicle/trailer and **NOT** the daytime running light feeds, otherwise the slow-speed facility WILL be overridden due to being **permanently ON**.

WHITE – EARTH	Pin 1
BROWN – SIDELIGHT	Pin 2
YELLOW – INDICATOR	Pin 3
RED – NOT USED	

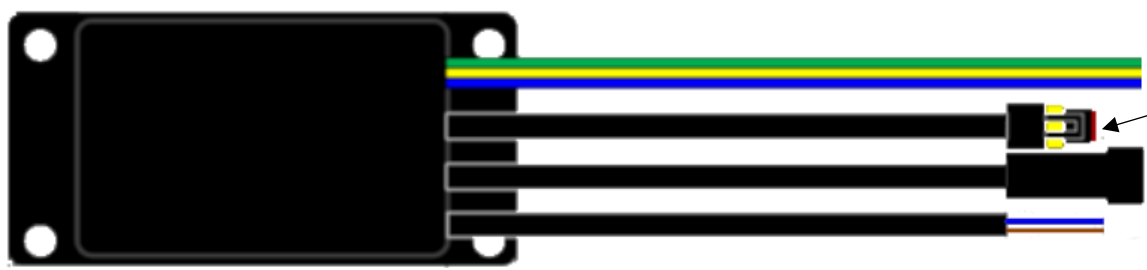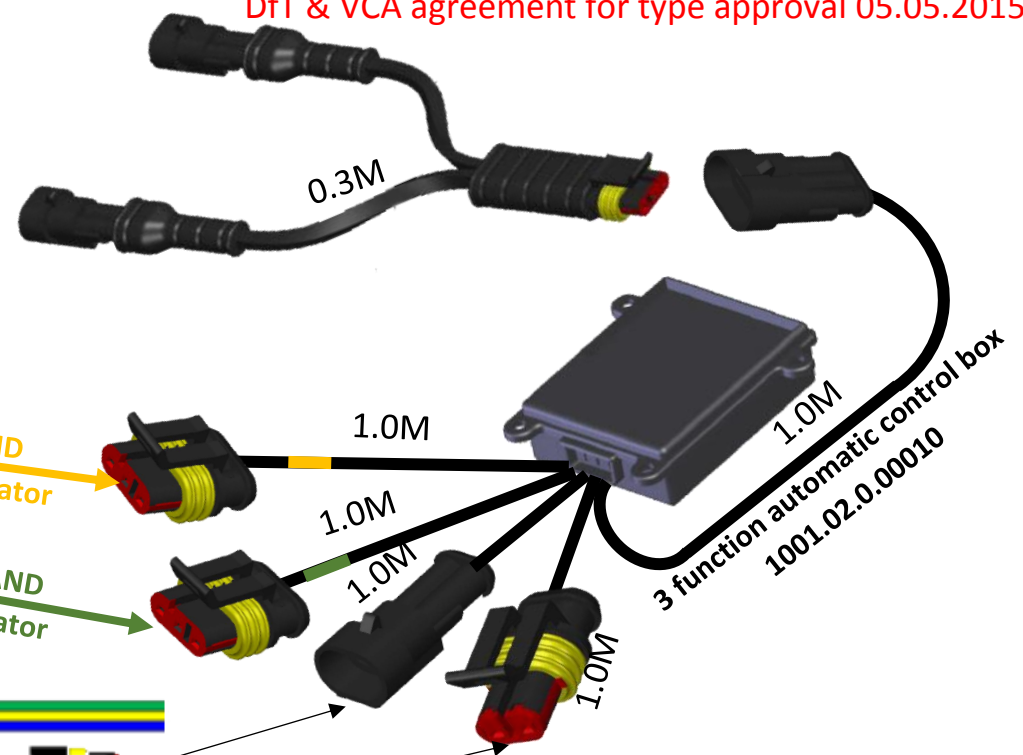


Rigid/Cab speed reader



CONNECT RIGID/CAB SPEED READER TO VEHICLE & JBDL AUTOMATIC CONTROL BOX

26/07/2016 11:39

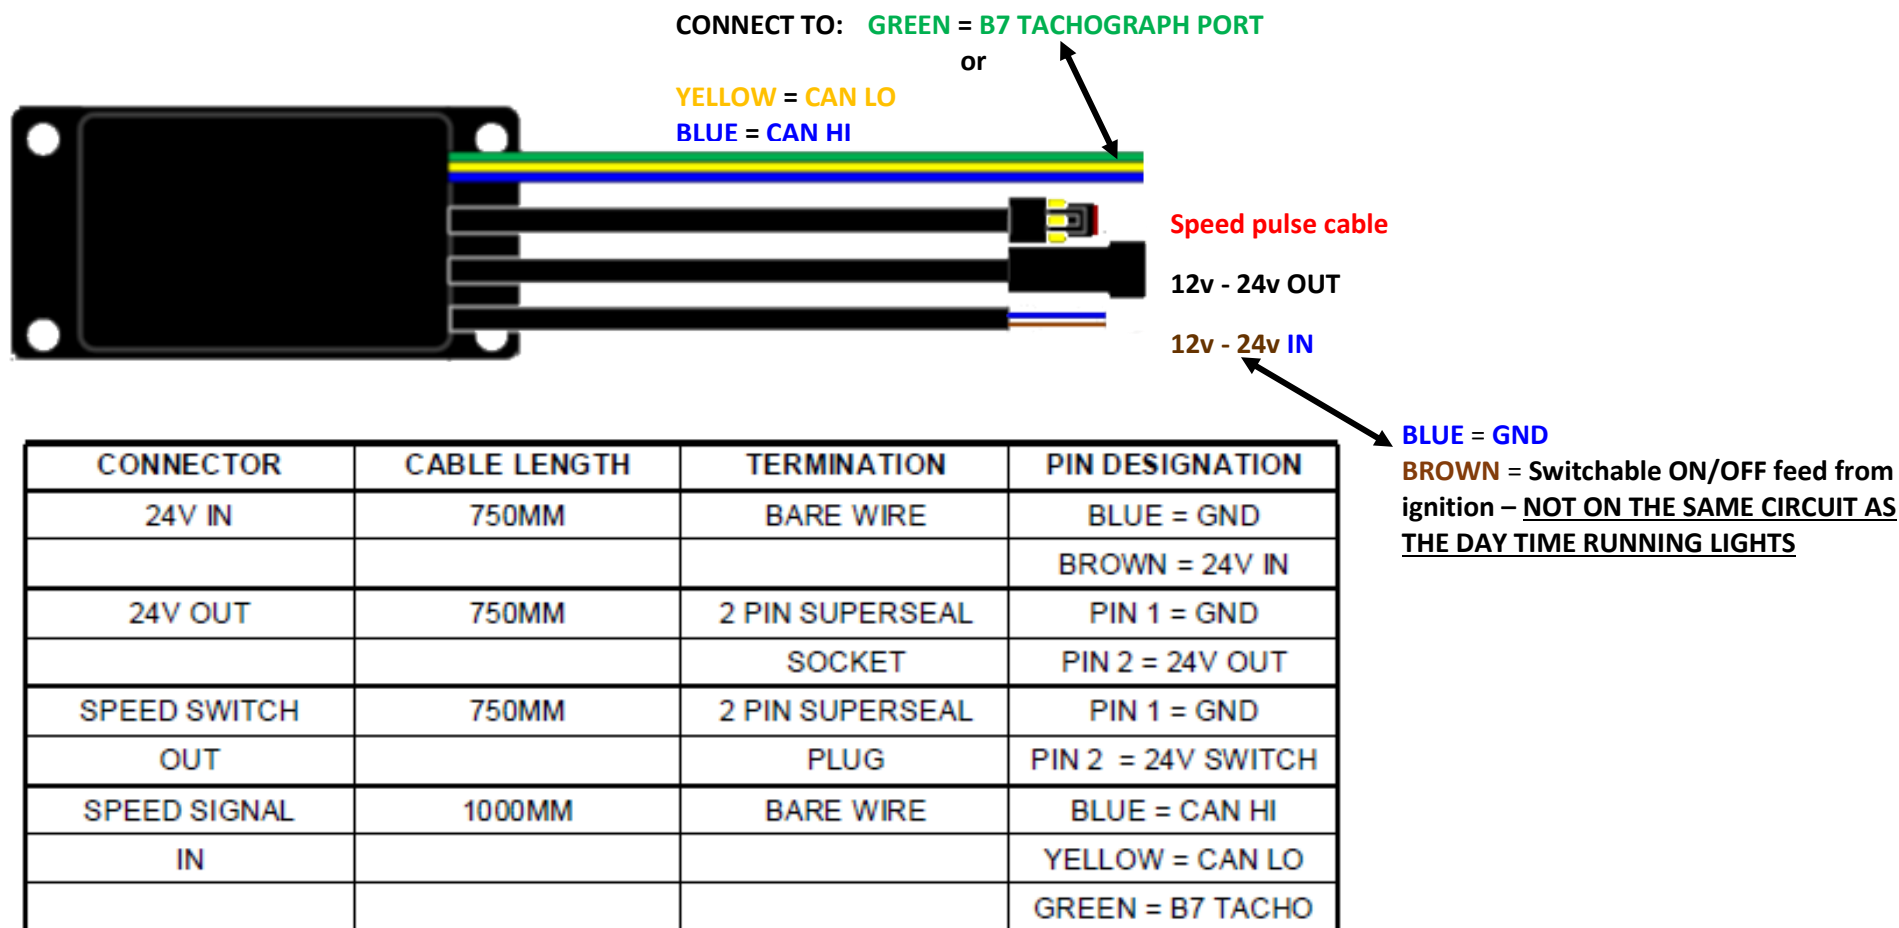

Please note:

A minimum of **12v** must supply this speed reader box. This gives a positive voltage to the JBDL controller between speeds of **0 kph – 15 kph**. Once **OVER 15 kph** through the **speed pulse cable**, this is picked up inside the JBDL controller and reduces to **0v**. This turns the downlights **OFF** using the slow-speed function.